



合金无感电阻MPR

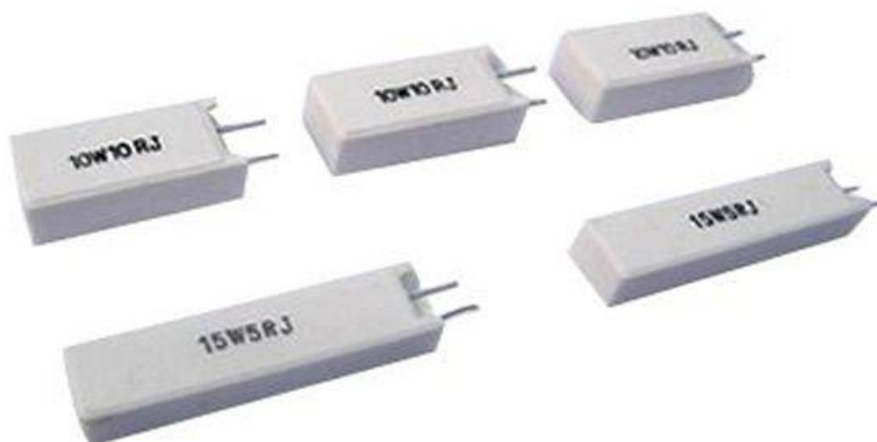

尺寸结构图

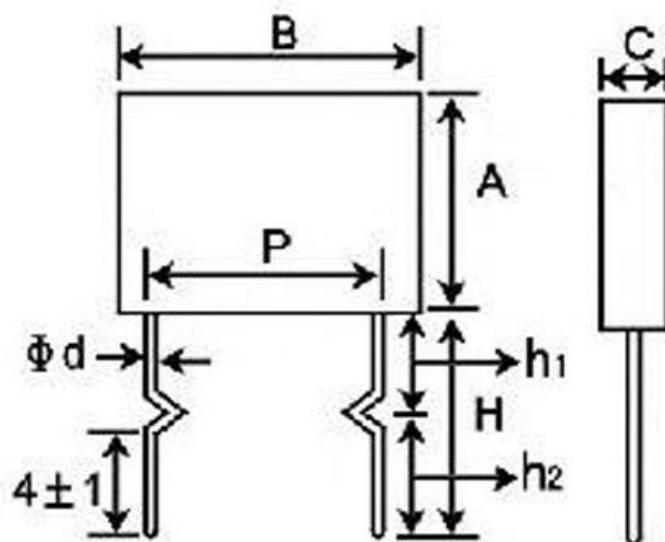

产品技术参数：

产品	合金无感水泥型电阻器（MPR型）											
特点	耐热性好、温度系数小、噪声低、负荷功率大、绝缘性高。 使用环境温度：-55℃~+275℃ 阻值误差：±1%，±5%.											
额定功率	尺寸									阻值范围		
	A	B	C±1	H1±1	H2±1	H3±1	d±0.1	R	p±0.1	E12·J(±5%)	E12·J(±5%)	
	2W	8.5±0.1	14.0±0.1	5	3	6.25	3.4	0.8	±0.5	9	0.01-0.68	0.01-0.68
	3W	13.0±0.1										
	5W	18.0±0.1										
10W	17±1.5	26.0±1.5	20							0.05-1.0		
性能												
项目			规格值					5202测试方法				
温度系数			±100ppm/°C					5.2 condition B 条件B				
短时间过负荷			ΔR≤±(2% R0+0.05Ω)					1W-3W: .2.5倍额定电力，5秒 5W-20W: 10倍额定电力，5秒				
耐电压			500V					5.7				
耐湿负荷寿命			ΔR≤±(3% R0+0.05Ω)					7.9				
室温寿命			ΔR≤±(3%R0+0.05Ω)					7.1				
热冲击			ΔR≤±(2% R0+0.05Ω)					JIS 5026 6.7				